

Build your connector part numbers

Shell style:

Plug with RFI shielding, integrated backshell and standard crimp contacts

Shell size:

Plating:

Contact layout:

Contact #26
Resistance 16mΩ
Rating 3A

Contact #22D
Resistance 14.6mΩ
Rating 5A

Contact #20
Resistance 7.3mΩ
Rating 7.5A

Contact #16
Resistance 3.8mΩ
Rating 13A


Contact #12
Resistance 3.5mΩ
Rating 23A

Contact #8
Note: Concentric
Twinax (= Triax)

Hybrid
Note: Concentric
Twinax (= Triax)

Contact type:

Orientation:

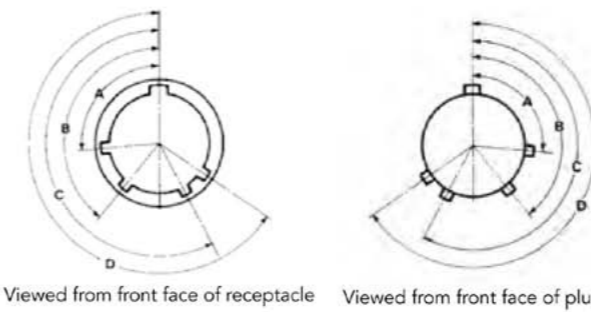

Shell size	Angles	N	A	B	C	D	E	T	V
9 (A)	A°	105	102	80	35	64	91	-	-
	B°	140	132	118	140	155	131	-	-
	C°	215	248	230	205	234	197	-	-
	D°	265	320	312	275	304	240	-	-
11 (B) 15 (D)	A°	95	113	90	53	119	51	-	-
	B°	141	156	145	156	146	141	-	-
	C°	208	182	195	220	176	184	-	-
	D°	236	292	252	255	298	242	-	-
13 (C)	A°	95	113	90	53	119	51	70	75
	B°	141	156	145	156	146	141	136	138
	C°	208	182	195	220	176	184	218	224
	D°	236	292	252	255	298	242	261	268
17 (E) 21 (G)	A°	80	135	49	66	62	79	58	85
	B°	142	170	169	140	145	153	162	150
	C°	196	200	200	200	180	197	188	191
	D°	293	310	244	257	280	272	316	307
19 (F) 23 (H) 25 (J)	A°	80	135	49	66	62	79	-	-
	B°	142	170	169	140	145	153	-	-
	C°	196	200	200	200	180	197	-	-
	D°	293	310	244	257	280	272	-	-

Without contact:

Note: Power, Quadrax and Optical layouts, please consult us. Square flange and jam nut receptacles on request.

Results

SOURIAU part number

8DA | **5** | | | | | | | | | |

Designation

Plug with RFI shielding
with standard crimp contacts

Shell style Shell size Plating Layout Contact Orientation Option